


Products in Family


GRIX1333U/2GB (1 x 2GB 2Rx8 DIMM)
 GRIX1333U/4GB (1 x 4GB 2Rx8 DIMM)
 GRIX1333U/8GB (1 x 8GB 2Rx8 DIMM)

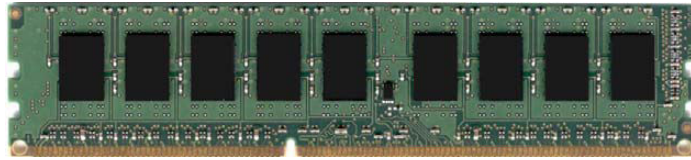

Features	Description
240-pin JEDEC-compliant DIMMs 133.35 mm wide by 30 mm high (1.181" x 5.25") Data Transfer Rate: 10.6 Gigabytes/sec Operating Voltage: 1.5 V ± 0.075 Fully RoHS Compliant	Each GRIX1333U upgrade consists of a single DDR3-1333 Unbuffered ECC DIMM that conforms to JEDEC's DDR3, PC3-10600 standard. One 2K-bit EEPROM is used for Serial Presence Detect.

Dataram Product	IBM Product	Supported in these IBM systems:
GRIX1333U/2GB GRIX1333U/4GB GRIX1333U/8GB	44T1569 44T1571 90Y3165	Numerous IBM System x server models

Front view

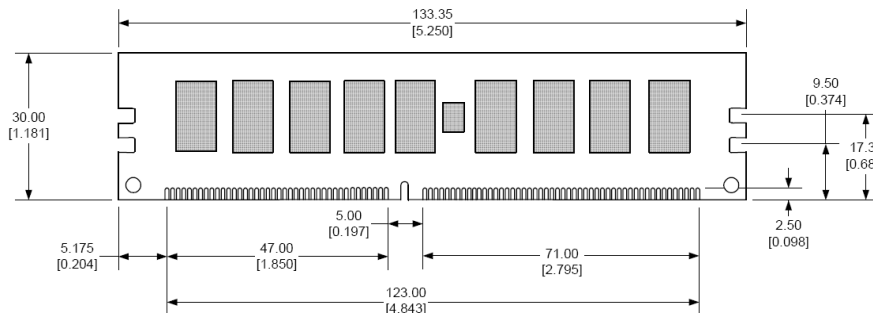


Notes

Tolerances on all dimensions except where otherwise indicated are ± 0.13 (.005).

All dimensions are expressed in millimeters [inches]

Back view

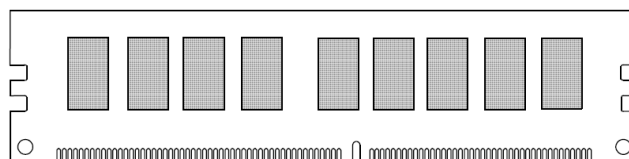

Side view

